

# Rotary actuator for butterfly valves

- Torque motor 90 Nm
- Nominal voltage AC 24...240 V / DC 24...125 V
  Control Open/close, 3-point
  With 2 integrated auxiliary switches





| 10 | ch | n | 2     | ata     |
|----|----|---|-------|---------|
|    |    | ш | u con | <br>ala |

| Electrical data | Nominal voltage                     | AC 24240 V / DC 24125 V   |  |  |
|-----------------|-------------------------------------|---|--|--|
|                 | Nominal voltage frequency           | 50/60 Hz  |  |  |
|                 | Nominal voltage range               | AC 19.2264 V / DC 19.2137.5 V   |  |  |
|                 | Power consumption in operation      | 20 W  |  |  |
|                 | Power consumption in rest position  | 7 W   |  |  |
|                 | Power consumption for wire sizing   | with 24 V 20 VA / with 240 V 55 VA  |  |  |
|                 | Auxiliary switch                    | 2x SPDT, 1x 10° / 1x 090° (default setting 85°)   |  |  |
|                 | Switching capacity auxiliary switch | 1 mA3 A (0.5 A inductive), DC 5 VAC 250 V   |  |  |
|                 | Connection protective earth         | Terminals 0.52.5 mm², copper conductors only  |  |  |
|                 | Connection supply / control         | Terminals 0.52.5 mm², copper conductors only  |  |  |
|                 | Connection auxiliary switch         | Terminals 0.52.5 mm², copper conductors only  |  |  |
|                 | Parallel operation                  | Yes (note the performance data)   |  |  |
| Functional data | Torque motor                        | 90 Nm   |  |  |
|                 | Manual override                     | hand crank  |  |  |
|                 | Running time motor                  | 35 s / 90°  |  |  |
|                 | Running time motor variable         | 20120 s   |  |  |
|                 | Sound power level, motor            | 65 dB(A)  |  |  |
|                 | Position indication                 | Mechanical, integrated  |  |  |
| Safety data     | Protection class IEC/EN             | I, protective earth (PE)  |  |  |
|                 | Protection class UL                 | I, protective earth (PE)  |  |  |
|                 | Power source UL                     | Class 2 Supply  |  |  |
|                 | Degree of protection IEC/EN         | IP66/67   |  |  |
|                 | Degree of protection NEMA/UL        | NEMA 4X   |  |  |
|                 | Housing                             | UL Enclosure Type 4X  |  |  |
|                 | EMC                                 | CE according to 2014/30/EU  |  |  |
|                 | Low voltage directive               | CE according to 2014/35/EU  |  |  |
|                 | Certification IEC/EN                | IEC/EN 60730-1 and IEC/EN 60730-2-14  |  |  |
|                 | UL Approval                         | cULus according to UL60730-1A, UL60730-2-14 and CAN/CSA E60730-1  The UL marking on the actuator depends on the production site, the device is UL-compliant in any case |  |  |
|                 |                                     | Type 1  |  |  |



# Technical data sheet IRCA-S2-T

| Technical data  |  |                                   |
|-----------------|--|-----------------------------------|
| Safety data     | Overvoltage category                   | III                               |
|                 | Rated impulse voltage auxiliary switch | 4 kV                              |
|                 | Pollution degree                       | 3                                 |
|                 | Ambient humidity                       | Max. 100% RH                      |
|                 | Ambient temperature                    | -3050°C [-22122°F]                |
|                 | Storage temperature                    | -4080°C [-40176°F]                |
|                 | Software Class                         | A                                 |
|                 | Servicing                              | maintenance-free                  |
| Mechanical data | Connection flange                      | F07 (F05/F10 only with accessory) |
| Weight          | Weight                                 | 3.7 ka                            |

## Safety notes



- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Caution: Mains voltage!
- The device has a protective earthing. Incorrect connection of the protective earth can lead to hazards due to electrical shock.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- Apart from the wiring compartment, the device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device is not designed for applications where chemical influences (gases, fluids) are
  present or for utilisation in corrosive environments in general.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- The two switches integrated in the actuator are to be operated either on mains voltage or on safety extra-low voltage. The combination mains voltage/safety extra-low voltage is not permitted.
- In case of maintenance work on the hydronic system, the correct valve position must be set
  via the control signal. Additionally, the actuator has to be disconnected from the power
  supply. The hand crank and manual override must not be used as a safety measure to
  maintain the set valve position.

## **Product features**

### Fields of application

The actuator is particularly suitable for utilisation in outdoor applications and is protected against the following weather conditions:

- UV radiation
- Dirt / Dust
- Rain / Snow
- Air humidity

#### Internal heating

An internal heater prevents condensation buildup.

Thanks to the integrated temperature and humidity sensor, the built-in heater automatically switches on/off.

#### Parametrisable actuators

The factory settings cover the most common applications.

Belimo Assistant 2 is required for parametrisation via Near Field Communication (NFC) and simplifies commissioning. Moreover, Belimo Assistant 2 provides a variety of diagnostic options.



### **Product features**

**Simple direct mounting** Simple direct mounting on the butterfly valve. The mounting orientation in relation to the butterfly valve can be selected in 90° (angle) increments.

**Manual override** The valve can be manually operated using a hand crank. Unlocking is carried out manually by

removing the hand crank.

**High functional reliability** The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.

Innovative motorisation The actuator uses the powerful Belimo M600 microchip in combination with the INFORM

method. It provides the full starting torque from a standstill with high precision (sensorless

INFORM-Drive by Prof. Schrödl).

Flexible signalling The actuator has one auxiliary switch with a fixed setting (10°) and one adjustable auxiliary

switch (0...90°).

### **Accessories**

| Tools                  | Description  | Туре                        |
|------------------------|--|-----------------------------|
|                        | Service tool for wired and wireless setup, on-site operation, and troubleshooting.                       |                             |
|                        | Converter Bluetooth / NFC  | ZIP-BT-NFC                  |
| Mechanical accessories | Description  | Туре                        |
|                        | Position indicator and tappet shaft, F07, square 45° offset, SW 17, DN 125150                            | ZJR01                       |
|                        | Position indicator and tappet shaft, F05, square 45° offset, SW 14, DN 50100                             | ZJR03                       |
|                        | Tappet shaft, F07, square 45° offset, SW 17  | ZPR02                       |
|                        | RetroFIT+ adapter kit, F07/F10 (incl. screws F07), flat head/square, SW 17                               | ZPR05                       |
|                        | RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 14                              | ZPR06                       |
|                        | Adapter kit with spacer ring, F07, square 45° offset, SW 17  | ZPR08                       |
|                        | RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 14                           | ZPR09                       |
|                        | RetroFIT+ adapter kit, F05/F07/F10 (incl. screws F05), flat head/square, SW 14                           | ZPR10                       |
|                        | RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 18                              | ZPR11                       |
|                        | RetroFIT+ adapter kit, F07/F10 (incl. screws F07), flat head/square, SW 16                               | ZPR12                       |
|                        | RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 11                           | ZPR13                       |
|                        | RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 12.7                         | ZPR14                       |
|                        | RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 11                              | ZPR15                       |
|                        | Hand crank for JR actuator<br>Spacer ring, F04/F05, Height 22 mm<br>Spacer ring, F05/F07, Height 23.5 mm | ZJR20<br>ZRI-001<br>ZRI-002 |

# **Electrical installation**




Caution: Mains voltage!


Parallel connection of other actuators possible. Observe the performance data.





# **Electrical installation**


AC 24...240 V / DC 24...125 V












Auxiliary switch



# **Operating controls and indicators**

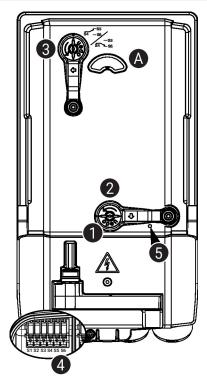

5 LED display green

Off: No power supply or malfunction

On: In operation

### **Auxiliary switch settings**



**Note:** Perform settings on the actuator only in deenergised state.

For the auxiliary switch position settings, carry out points 1 to 4 successively.

1 Gear train disengagement

Opening the manual override cover and adjusting the hand crank. Manual override is possible.

2 Manual override

Turn the hand crank until the desired switching position (A) is indicated and then remove the hand crank.

3 Auxiliary switch

For the auxiliary switch position settings, carry out points 1


to 4 successively.

Opening the auxiliary switch adjustment cover and adjusting the hand crank. Turn the hand crank until the arrow points to the line.

4 Terminals

Connect continuity tester to S4 + S5 or to S4 + S6.

If the auxiliary switch should switch in the opposite direction, rotate the hand crank by 180°.



### Service

Rotary actuator, Open/close, 3-point, AC 24...240 V / DC 24...125 V, 90 Nm, Running time motor 35 s



# Service

#### Wireless connection


Belimo devices marked with the NFC logo can be operated with Belimo Assistant 2.

Requirement:


- NFC- or Bluetooth-capable smartphone
- Belimo Assistant 2 (Google Play and Apple AppStore)


Align NFC-capable smartphone on the device so that both NFC antennas are superposed.

Connect Bluetooth-enabled smartphone via the Bluetooth-to-NFC converter ZIP-BT-NFC to the device. Technical data and operating instructions are shown in the ZIP-BT-NFC data sheet.

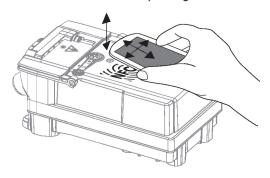

### **Dimensions**

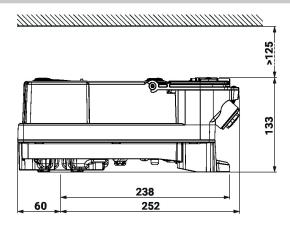

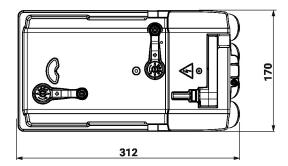

## **Further documentation**

- The complete product range for water applications
- Data sheets for butterfly valves
- Installation instructions for actuators and/or butterfly valves
- General notes for project planning
- Quick Guide Belimo Assistant 2